

YAESU SP-2000

BASE SPEAKER FOR YAESU HF TRANSCEIVERS




The Yaesu SP-2000 is an external speaker to match the FT-2000 line of transceivers, however can also be used with other HF transceivers.

Features

- 120 mm (4.7") Speaker with audio response specially tailored for communications and short-wave reception
- High-Cut (SSB) (2.4kHz, 1kHz, 700Hz) and Low-Cut (CW) (500Hz, 300Hz) audio filters, with response selectable from the front panel. (can also select "NORM" for no filtering application)
- Two transceivers can be connected, and individually selected via the Front Panel Input switch (2 Gold Plated Input Jacks on Rear Panel)
- Mute Switch
- Front Panel 1/4" headphone jack is provided to monitor tone quality and filter adjustment
- Extender Feet
- Gold Plated Line-Out Jack on Rear Panel, that may be used for tape recording or connection to other audio devices.

Specifications

Speaker Aperture : 120mm (4.7")
Maximum Input : 7 Watts
Input Audio Impedance : 8 Ohm
Audio Frequency Response : 200 ~ 11,000 Hz
Filter Characteristics (Cutoff Frequencies):
LOW 1 : Approx 300Hz (-6dB/Oct)
LOW2 : Approx 500Hz (-6dB/Oct)
HIGH1 : Approx 2.4kHz (-6dB/Oct)
HIGH2 : Approx 1kHz (-6dB/Oct)
HIGH3 : Approx 700Hz (-6dB/Oct)
Case Size : W 200 x H 135 x D 350 mm, without knobs/jacks
Weight : 2,5 kg

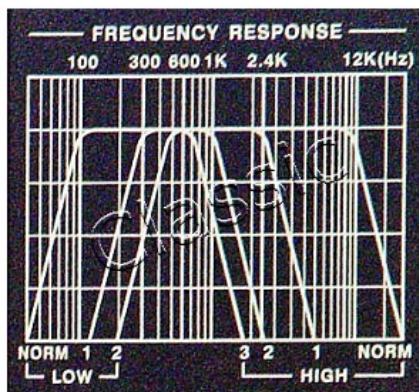

Article id: **YAESU SP-2000**

Price: **€ 170,00**

ex VAT € 140,50