


# MIRAGE B-320G

2 M. LINEAIR | PREAMP  
OUTPUT 200 W

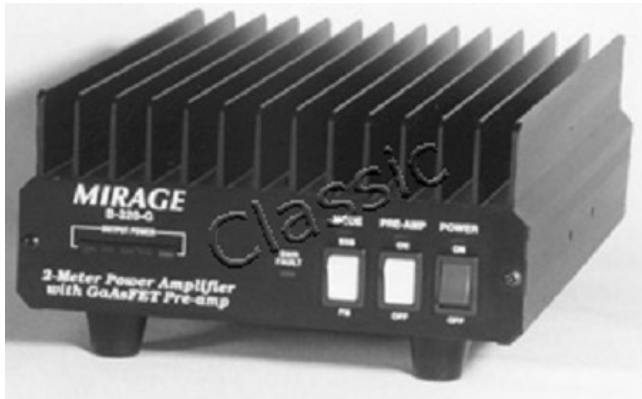

The B-320G all-mode Linear Amplifier including Low Noise Preamp is well suited for use with handheld as well as with a transceiver. Choose input power 0.25 - 10 W or 10-50 W. Only at 3 or 50W input power the B-320G will give you up to 200 W output power.

First class stripline technique provides excellent RF performance. The B-310G is protected against reversed polarity.

#### Power curve

Input 0,3 W : Output 1,5 W | 132 W (LO/Hi input)  
Input 0,5 W : Output 4 W | 165 W (LO/Hi input)  
Input 3 W : Output 32 W | 200 W (LO/Hi input)  
Input 10 W : Output 95 W  
Input 25 W : Output 165 W  
Input 50 W : Output 200 W

#### Specifications

Frequency : 144-148 MHz  
Modes : FM, SSB, CW  
Low Noise Preamp : yes, 15 dB  
Consumption : 15 A  
Supply voltage : 13,8 VDC  
Connections : SO 239  
Dimensions : W 197 x D 248 x H 70 mm

Mobile Bracket is included.

Article id: **MIRAGE B-320G**

Price: **€ 659,00**

ex VAT € 544,63